


Ref. : 018555
Gencod 3476060001856
UPC: 5

POLYPERFOR - Punching machine

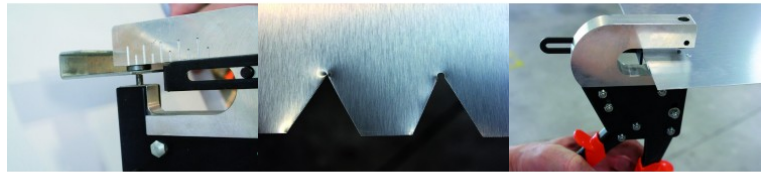

DIAMÈTRE DU POUÇON	Ø 3.3 MM	Ø 4.1 MM	Ø 4.9 MM	Ø 6.2 MM
Max	12 mm	1 mm	5.8 mm	5.5 mm
Tôle douce	15 mm	15 mm	12 mm	10 mm
Aluminium	3 mm	3 mm	2 mm	1.5 mm

Sheet metal and slate.
Punching power : 740 kg.
Supplied with 5 punches :
Ø 3.3 mm for sheet metal + Ø 3.3 mm for slate.
Ø 4.1 mm for steel suspension wires.
Ø 4.9 mm and 6.2 mm for threaded rod.
Precise graduation opening to max. 8 mm.
Adjustable depth guide up to 43 mm.
Applications : roofing, suspended ceilings etc.